

1

2

3

4

5

6




7

Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

IEEE 1394 6M  
PLASTIC:BLACK

1800 ± 30mm

IEEE 1394 6M  
PLASTIC:BLACK



**NOTE:**

- CABLE: [28 AWG(7/0.127)T.C\*1PAIR+AL/MYLAR+BRAID SHIELD(16/5/0.1)T.C]\*2  
+22AWG (7/0.254)T.C\*2C+DRAIN WIRE(7/0.1)+MYLAR\*2+AL/MYLAR+BRAID(24/8/0.1)90%  
+PVC JACKET COLOR:MATT BLACK,OD:6.0±0.3mm  
UL20276 APPROVED IEEE 1394 CABLE

**2. CONNECTOR:**


P1&P2 : IEEE1394 6 PIN MALE CONTAC:GOLD PLATED 15u"; NICKEL PLATED SHELL

3.HOOD : MOLDED TYPE,PVC 45P,COLOR:MATT BLACK.

**4.TEST REQUESTED:**

- <1>.100% OPEN SHORT MIS WIRE TEST
- <2>.CONTACT RESISTANCE 3Ω MAX
- <3>.INSULATION RESISTANCE 20MΩMIN

5.PACKING:SEE P-0039 REV.C PACKING DRAWING  
PACKING TYPE :DB VP3  
(HANKING SIZE MUST BE SMALLER THAN PACKING)

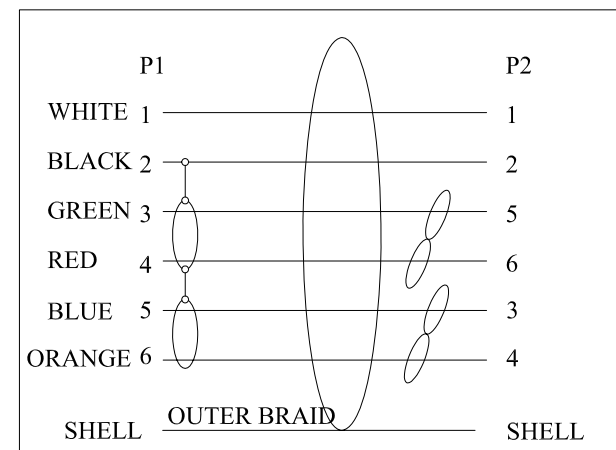

RoHS Compliant

EAN Code:  
4016032051718

ST81407

	Date	Name	Part No.
Drawn by	Dec.20,2005	Norman Xu	<b>AK-1394-18</b>
Checked by	Dec.20,2005	Alex Dan	
Approved by			
<b>ASSMANN</b> Electronic GmbH			Title:
			1394 A 6PIN MALE TO 1394 A 6PIN MALE CABLE, 1.8M
Scale	N/A	Sheet	1/1
Unit	MM		

1

2

3

4

5

6

7