


Keystone Jack, CAT 6a
Class Ea, Tool Free Connection

Part No.: DN-93612

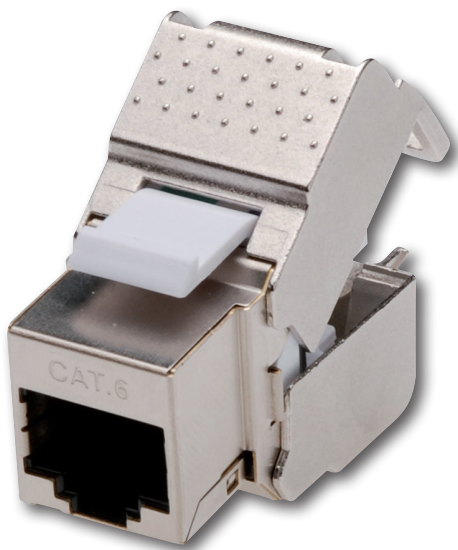

Attributes

Cable Entry:	Rear
Hole Plate Thickness:	Jack will clip into a hole plate thickness of 1.6mm Max
Body:	Zinc Die-casting, nickel-plated
Jack Contacts:	Phosphor Bronze
IDC Contacts:	Phosphor Bronze
Plating:	50µm of gold over 40µm of nickel
Wire Terminations:	Tool Free with Cap.
Wiring Standard:	EIA/TIA 568A/B
Conformance:	Category 6a / 10GBase-T Channel / Class Ea ANSI/EIA/TIA 568B.2.1:2002 ISO/IEC 11801:2002 EN50173-1: 2002
Certification:	Independent Laboratory
Dimension:	18x24x41mm
Weight:	ca. 23g

Shielded Keystone Jack

The fully downward compatible CAT 6a Keystone Jack makes an easy installation in combination with excellent measurements possible. The high quality ensures the usage with the most demanding applications like 10GBase-T. The innovative housing design offers quick and safe wire terminations without any special tool. Its compact form allows an installation of 24 Keystone Jacks in a row with a 19" 1U Patch Panel. These facts assure an uncomplicated mounting and marking as well as a high reliability.

