



LTR	REV.	DESCRIPTION	DATE
3	D	ECN # 030728-5 ADD LENGTH	07/28/03

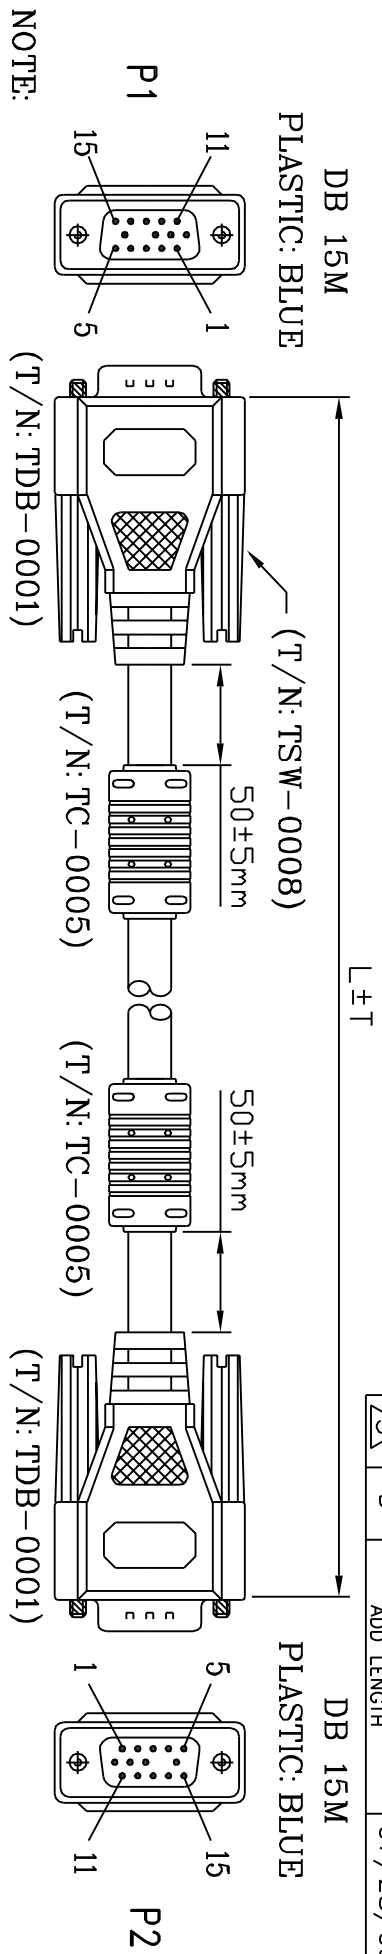

- NOTE:
1. CABLE: 28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INS: FO-PE INNER JACKET: PVC OD: $\phi 2.5 \pm 0.1$ mm UL-1354+28AWG(7/0.127 T.C)*7C+INS: SR-PVC ID: $\phi 0.85 \pm 0.05$ mm UL-1061+AL/MY+DRAIN WIRE: 26AWG (7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET: PVC COLOR: BEIGE(NK-A03) OD: $\phi 8.5 \pm 0.15$ mm UL-2919.
 2. CONNECTOR: P1&P2: HDB 15P MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL. 9TH PIN IS EMPTY.
 3. FERRITE CORE: 17.5*28.5*9.5mm.
 4. SHIELD: COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.
 5. HOOD: MOLDED TYPE, PVC 45P, COLOR: BEIGE(NK-A03).
 6. ELECTRICAL TEST: 100% OPEN SHORT MIS WIRE TEST. CONTACT RESISTANCE 3 Ω MAX INSULATION RESISTANCE 20M Ω MIN

7. PACKING: SEE P-0039 REV.C PACKING DRAWING.
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

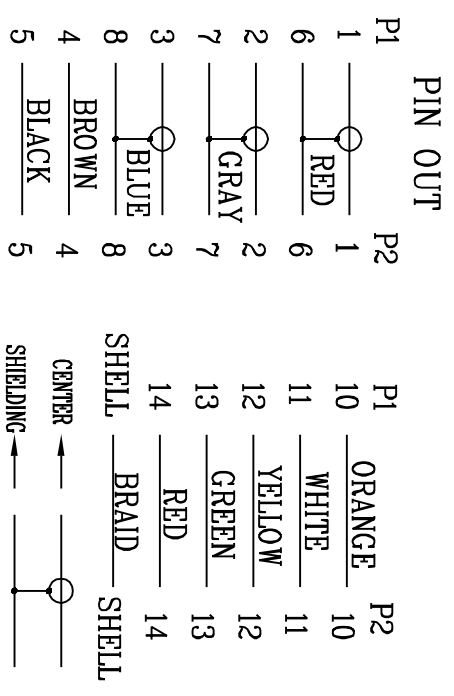

120-5412-7	AK	3760XF	2.2M	2200±50mm	4016032141556	DB	VP4
120-5412-6	AK	3820XF		20000±100mm	4016032089407	DB	VP5
120-5412-5	AK	3815XF		15000±100mm	4016032089377	DB	VP5
120-5412-4	AK	3780XF		10000±100mm	4016032050537	DB	VP5
120-5412-3	AK	3770XF		5000±100mm	4016032050520	DB	VP5
120-5412-2	AK	3760XF		3000±50mm	4016032050513	DB	VP4
120-5412-1	AK	5320XF		1800±50mm	4016032050544	DB	VP4
DWG		P/N		LENGTH	EAN CODE		BLISTER

Tolerance Inch M/M		Title	
.X	.015 .30	HDB 15M/M CABLE	
.XX	.010 .10	Customer P/N	
.XXX	.005 .05	App'd	
Draw	KIKI 07/29/03	Scale	NONE
Chek		Units	m/m
Engr		Third Angle Projection	
Customer P/N		Dwg No.	120-5412
Customer E-SSM		REV	E
Sheet 1/1			

ASSMANN Electronic