Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2005	01

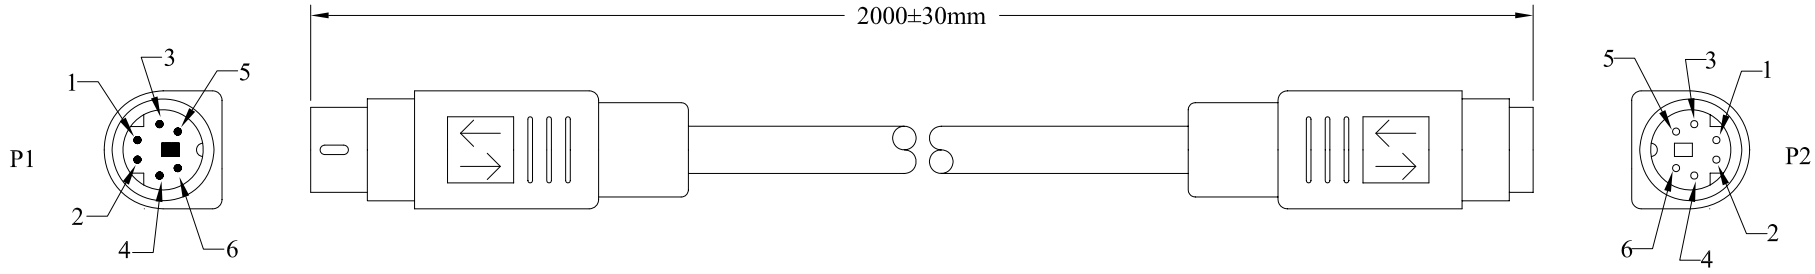

NOTES:

1.CABLE:NON-UL 28AWG(7/0.127)T.C*6C INS:PVC+DRAIN WIRE (7/.163)+
AL-FOIL/MYLAR PVC JACKET COLOR:BEIGE.
OD:Ø5.0±0.2mm

2.CONNECTOR:
P1:MD6P MALE TINNED PLATED CONTACT,
NICKEL PLATED SHELL .
P2:MD6P FEMALE TINNED PLATED CONTACT,
NICKEL PLATED SHELL .

3.HOOD:MOLDED TYPE, PVC 45P,COLOR:BEIGE.

4.ELECTRONIC TEST:100% OPEN SHORT MIS WIRE TEST .
CONTACT RESISTANCE 3 OHMS MAX .
INSULATION RESISTANCE 5 M OHMS MIN .

5.PACKING:SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPE: DB VP3.

PIN OUT

P1	1	2	3	4	5	6	SHELL
							DRAIN
P2	1	2	3	4	5	6	SHELL

RoHS Compliant

EAN Code:
4016032063179

	Date	Name
Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

ASSMANN
Electronic GmbH

ST81407

Part No.
AK 323/G

Title.
PS/2 KEYBOARD EXT CABLE

Scale	N/A	Sheet
Unit	MM	1/1