



AK-AV526 : 2.0M SCART PLUG TO 2x RCA PLUGS + 1x S-VHS PLUG, GOLD PLATED.

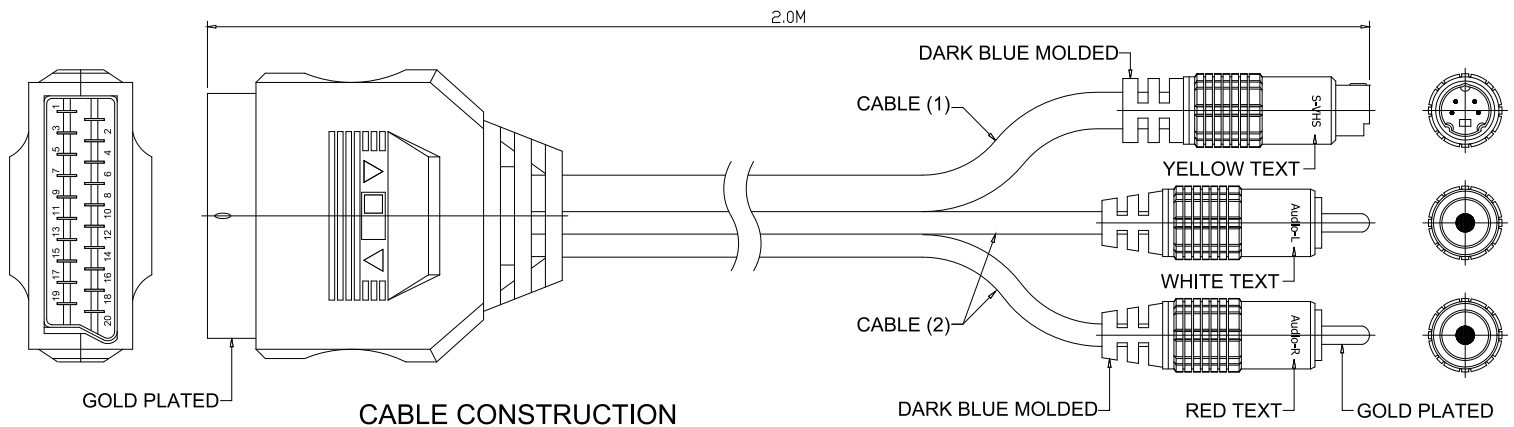


ITEM		CABLE (1) SPEC.	CABLE (2) SPEC.
CENTER CONDUCTOR	MATERIAL	COPPER WIRE	COPPER WIRE
	CONSTRUCT	mm/No. 0.16 x 16	0.12 x 20
	O.D.	mm 0.74 ± 0.05	0.62 ± 0.05
INSULATION	MATERIAL	PE FOAM	PE FOAM
	THICK	mm 0.28 ± 0.10	0.24 ± 0.10
	O.D.	mm 1.30 ± 0.10	1.10 ± 0.10
SPIRAL SHIELD	MATERIAL	COPPER WIRE	COPPER WIRE
	CONSTRUCT	mm/No. 0.12 x 36 ± 3	0.12 x 28 ± 3
	TYPE	SPIRAL	SPIRAL
MIDDLE PVC JACKET	MATERIAL	PVC	PVC
	O.D.	mm 2.30 ± 0.10 x 2C	2.00 ± 0.10
FILLING	MATERIAL	FILLER	X
PAPER	MATERIAL	PAPER	X
FOIL	MATERIAL	X	FOIL
OUTER BRAID SHIELD	MATERIAL	X	COPPER WIRE
	CONSTRUCT	mm/No. X	0.12 x 7 / 16
	TYPE	X	BRAID
PVC JACKET	MATERIAL	PVC	PVC
	O.D.	mm 6.50 ± 0.15 x 1F	4.00 ± 0.15 x 2F
	COLOR	DARK BLUE	DARK BLUE

WIRE ADDRESS

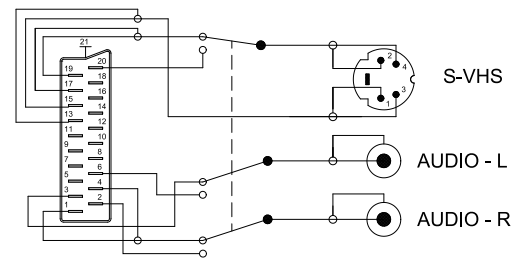

AK-AV526 : 2.0M SCART PLUG TO 2x RCA PLUGS + 1x S-VHS PLUG, GOLD PLATED.


08.23.2002 original

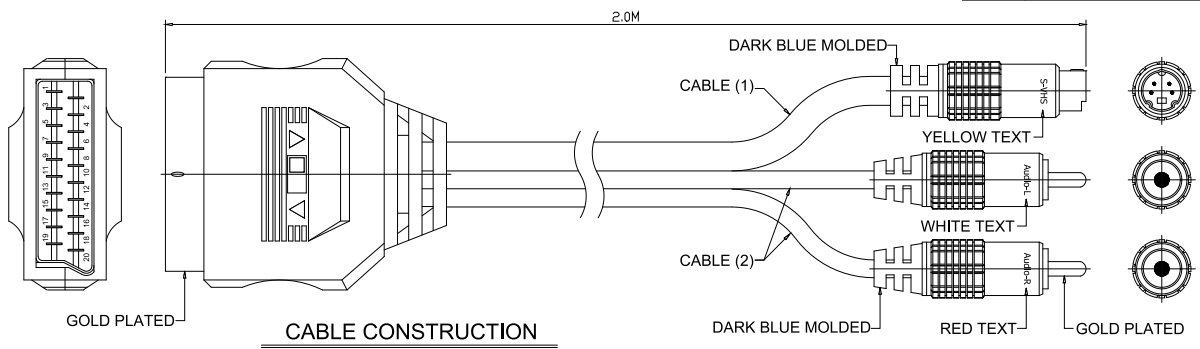

CABLE CONSTRUCTION

ITEM		CABLE (1) SPEC.	CABLE (2) SPEC.
CENTER CONDUCTOR	MATERIAL	COPPER WIRE	COPPER WIRE
	CONSTRUCT	0.16 x 16	0.12 x 20
O.D.	mm	0.74 ± 0.05	0.62 ± 0.05
	mm		
INSULATION	MATERIAL	PE FOAM	PE FOAM
	THICK	0.28 ± 0.10	0.24 ± 0.10
O.D.	mm	1.30 ± 0.10	1.10 ± 0.10
	mm		
SPIRAL SHIELD	MATERIAL	COPPER WIRE	COPPER WIRE
	CONSTRUCT	0.12 x 36 ± 3	0.12 x 28 ± 3
TYPE		SPIRAL	SPIRAL
MIDDLE	MATERIAL	PVC	PVC
	O.D.	2.30 ± 0.10 x 2C	2.00 ± 0.10
PVC JACKET			
FILLING	MATERIAL	FILLER	X
PAPER	MATERIAL	PAPER	X
FOIL	MATERIAL	X	FOIL
OUTER BRAID SHIELD	MATERIAL	X	COPPER WIRE
	CONSTRUCT	X	0.12 x 7 / 16
TYPE		X	BRAID
PVC JACKET	MATERIAL	PVC	PVC
	O.D.	6.50 ± 0.15 x 1F	4.00 ± 0.15 x 2F
COLOR		DARK BLUE	DARK BLUE

WIRE ADDRESS

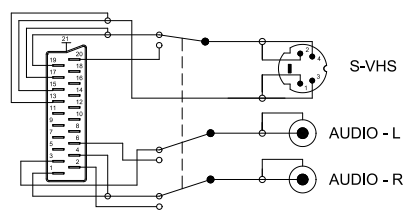

STANDARD TOLERANCE LIMITS UNLESS OTHER SPECIFIED	
RANGE	TOLERANCE
0-5	0.025 0.035
5-25	0.01 0.015
25-100	0.02 0.03
100-500	0.03 0.04
500-1000	0.04 0.05
1000-10000	0.05 0.06

æi	mm	ñÖ	1:1	sí	ý O ù	Éá	AK-AV526	Xíé
ík	ÅT=κ	¶/E	1/1	Éá	ASSMANN	Éá		08.23.2002
TSAY-E INTERNATIONAL INC.						íÖ		
A@é~¾¼q						í'		