


Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01


1	2	3	4	5	6	7	
A	B	C	D	E	F	G	H

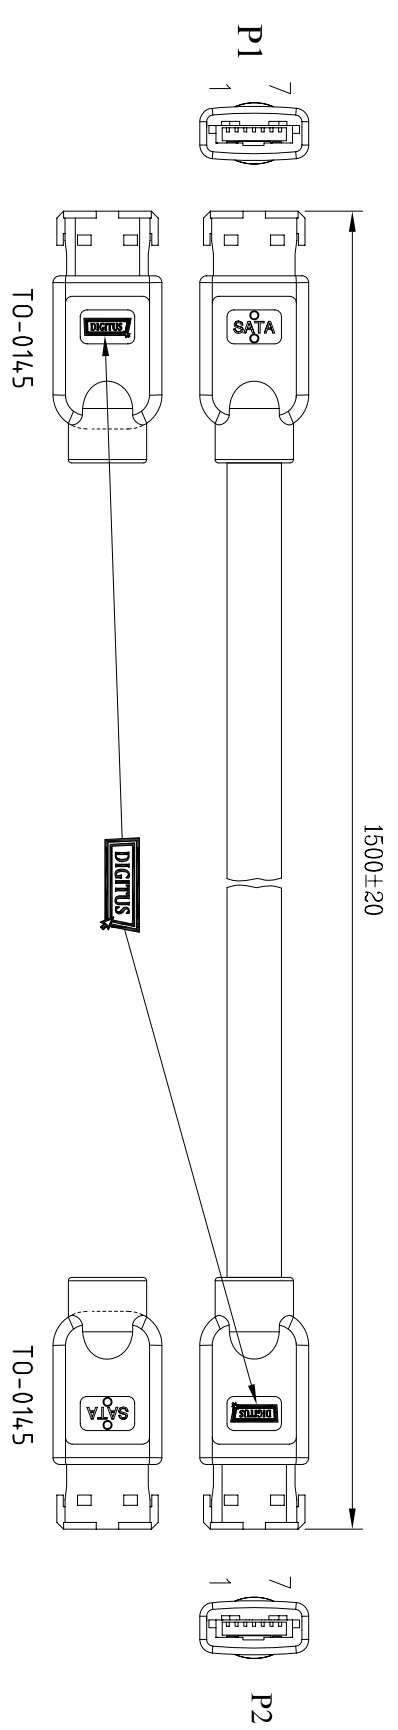

NOTES:

- CABLE:UL2725 [26AWG(1/0,404)*2F INS:HD-PE ID:1.3*2.7+DRAIN WIRE 28AWG(1/0,32)*2C+AL/MY]*2C INNER JACKET:PVC OD:7.3*2.1mm +AL/MY+BRAID(16/10/0.1)PVC JACKET, COLOR: BLACK, OD:9.0*4.0mm, IMPEDANCE: 100 OHM.
- CONNECTOR:
 - P1&P2:SATA II 7P RIVETING TYPE CRIMP TYPE PBT BLACK G/F W/METAL SHELL
 - 3.SHIELD:COPPER-FOIL
 - 4.HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.
- TEST REQUEST:
 - 100% OPEN SHORT MIS WIRE TEST
 - CONTACT RESISTANCE 3 ohm MAX.
 - INSULATION RESISTANCE 10M ohm MIN.
 - HI-POT DC300V/0.01SEC.
- PACKAGING: SEE P-0039 PACKING DRAWING.
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

PIN ASSIGNMENT

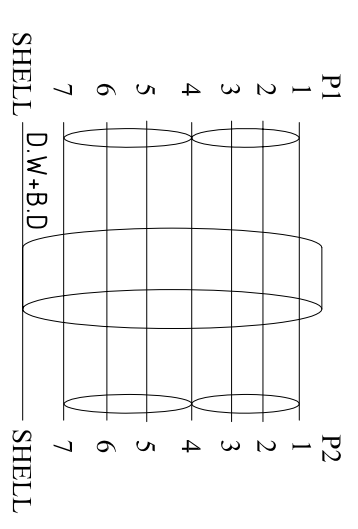

	Date	Name	Part No.
Drawn by	Dec:08,2007	N. Xu	DK-126003
Checked by	Dec:08,2007	ALDan	
Approved by	Dec:08,2007	T.Aulemann	
Title			
SATA Cable, Connect,Sata L-Type, 2 COLOR MOLD WITH DIGITUS LOGO			
Scale	N/A	Sheet	1/1
Unit	MM		

RoHS Compliant

S181407