


	1	2	3	4	5	6	7	
						Signature Norman Xu	Revision History For Bulk Production	Date Dec.20,2005 Rev. 01

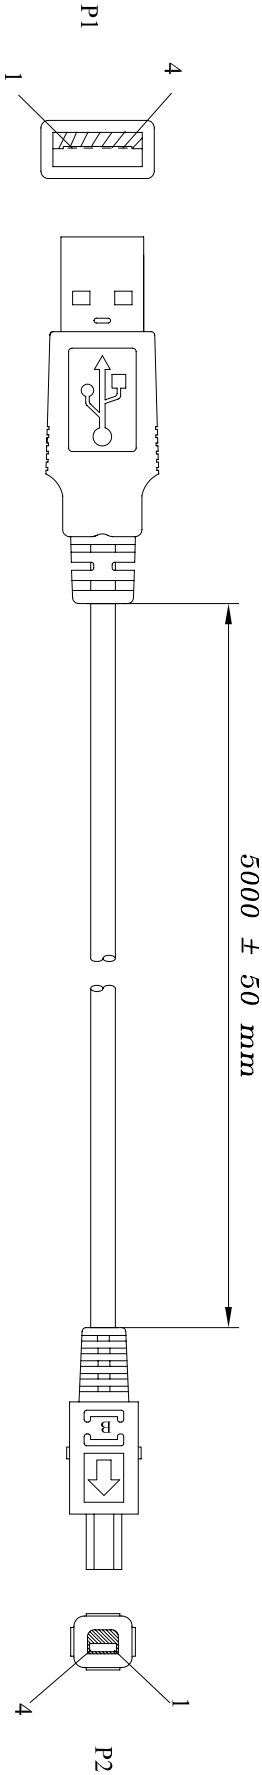

A								A
B								B
C								C
D	NOTES:							D

1. CABLE: UL-2725 28AWG*2C+28AWG*1PR+AL-FOIL/MYLAR
+SPIRAL PVC JACKET (90P) OD:3.5± 0.15mm
COLOR:BLACK.

2.CONNECTORS:

P1: USB A TYPE MALE GOLD FLASH CONTACT
NICKEL PLATED SHELL.
P2: (MITSUMI)MINI USB 4P MALE EQUIVALENT (B TYPE)

3.HOOD: MOLDED TYPE,PVC 45P, COLOR:BLACK.

4.TEST REQUESTED:

- <1>.100% OPEN SHORT & MIS WIRE TEST.
- <2>.CONTACT RESISTANCE 3Ω MAX.
- <3>.INSULATION RESISTANCE 20MΩ MIN.
- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING
- PACKING TYPE: DB VP4
- (HANKING SIZE MUST BE SMALLER THAN PACKING)

P1	P2
RED 1	1
WHITE 2	2
GREEN 3	3
BLACK 4	4
SHELL	SHELL

G								G
---	--	--	--	--	--	--	--	---

	Date	Name	Part No.
Drawn by	Dec.20,2005	Norman Xu	AK 670M-5
Checked by	Dec.20,2005	Alex Dan	
Approved by			

Title:

Mini USB Cable

RoHS Compliant

EAN Code:
4016032083078

STR1407

H	RoHS Compliant EAN Code: 4016032083078				STR1407		ASSMANN Electronic GmbH		Title:			H
									Mini USB Cable			
									Scale	N/A	Sheet	
1	2	3	4	5	6	7	Unit	MM	1/1			