


Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2005	01

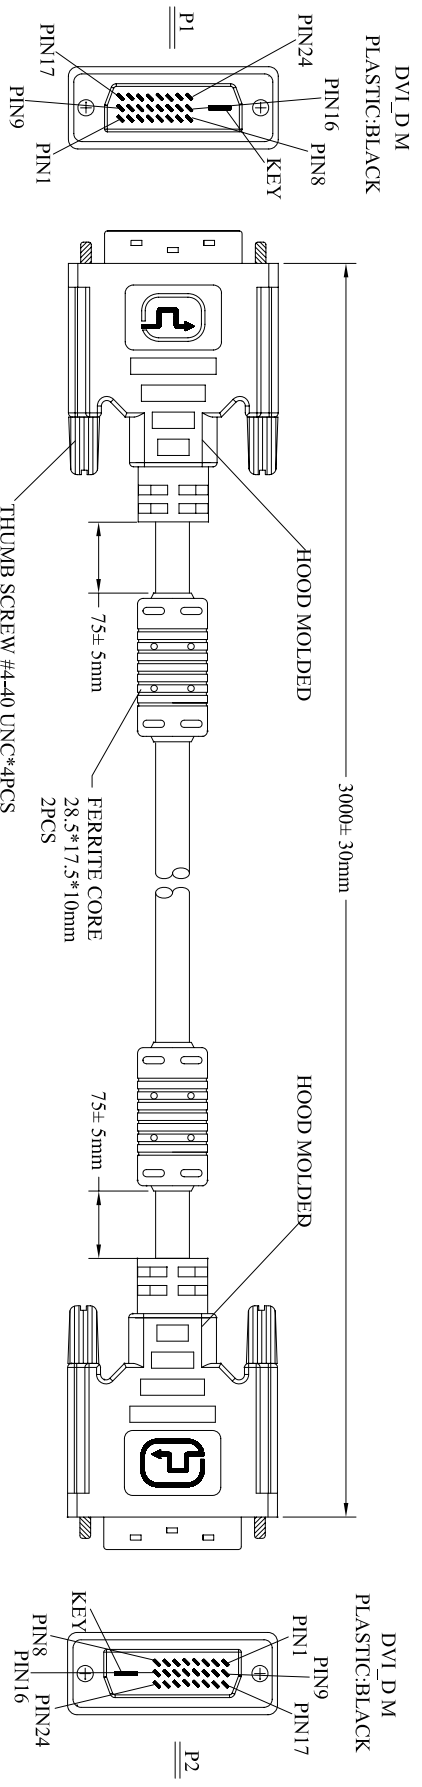

NOTES:

- CABLE:[28AWG(7/0.127)*1P+DRAIN WIRE+AL/MYLAR]*7C+28AWG(7/0.127)T.C*1P +28AWG(7/0.127)*3C+AL/MYLAR+BRAID SHIELDS+JACKET:PVC OD: 8.6± 0.15mm UL20276 APPROVED. COLOR:BLACK
- CONNECTOR:
P1&P2:DVI_D 25P: 24P+KEY MALE, GOLD FLASH CONTACT, TIN PLATED SHELL.
3.SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- HOOD:
P1&P2:MOLDED TYPE, PVC 45P, COLOR:BLACK
- TEST REQUEST:
(1) 100% SHORT OPEN & MIS WIRE TEST.
(2) CONTACT RESISTANCE 3 OHMS MAX.
(3) INSULATION RESISTANCE 20M OHMS MIN.
(4) HI-POT VOLTAGE: 300V DC.
- PACKING:SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPE: DB VP4.

WIRE CONNECTION

P1	WIRE COLOR	P2
1		1
2		2
3		3
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

RoHS Compliant

EAN Code: 4016032126157

Date	Name
Dec.20,2005	Alex Dan
Dec.20,2005	Norman Xu
Approved by	

Part No. **AK 621N-3**

Title: **DVI_D - DVI_D DUAL LINK CABLE**

Scale: N/A Unit: MM Sheet: 1/1

ASSMANN
Electronic GmbH

1	2	3	4	5	6	7
H	G	F	E	D	C	B