


Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Dec:20,2005	01

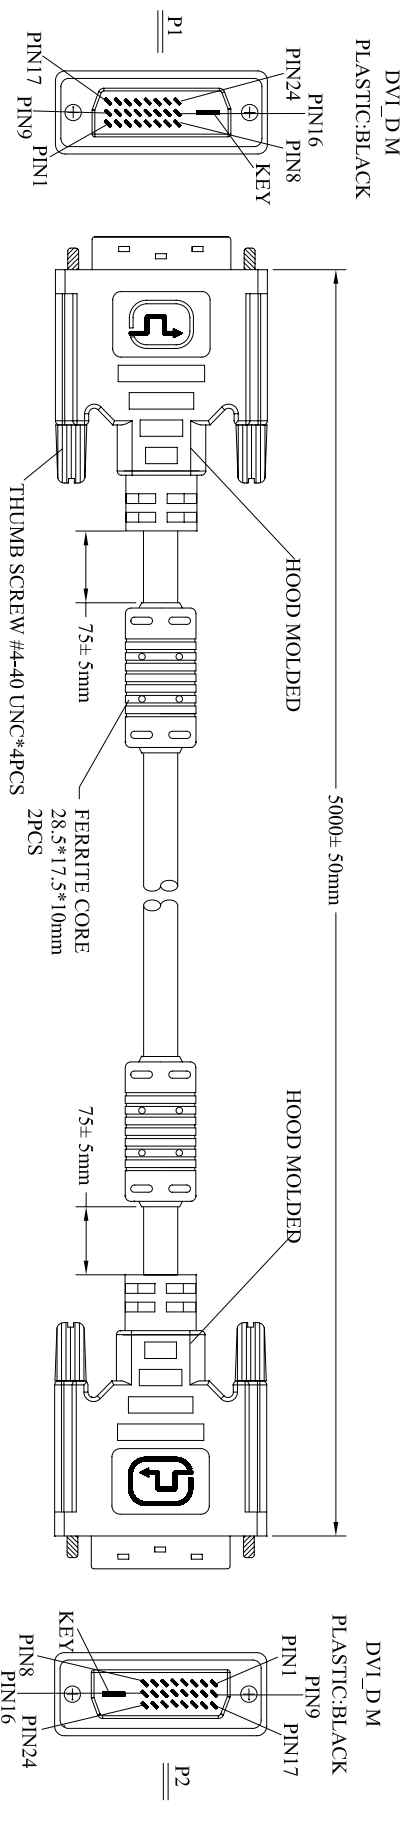

WIRE CONNECTION

P1	WIRE COLOR	P2
1		1
2		2
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

NOTES:

- CABLE:[28AWG(7/0.127)*1P+DRAIN WIRE+AL/MYLAR]*7C+28AWG(7/0.127)T.C*1P +28AWG(7/0.127)*3C+AL/MYLAR+BRAID SHIELDS+JACKET.PVC OD: 8.6±0.15mm UL20276 APPROVED. COLOR:BLACK
- CONNECTOR:
P1&P2:DVI_D 25P-24P+KEY MALE. GOLD FLASH CONTACT, TIN PLATED SHELL.
- SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- HOOD:
P1&P2:MOLDED TYPE, PVC 45P, COLOR:BLACK
- TEST REQUESTED:
(1) 100% SHORT OPEN & MIS WIRE TEST.
(2) CONTACT RESISTANCE 3 OHMS MAX.
(3) INSULATION RESISTANCE 20M OHMS MIN.
(4) HI-POT VOLTAGE: 300V DC.
- PACKING:SEE P-0039 REV.C PACKING DRAWING (HANKING SIZE MUST BE SMALLER THAN PACKING) PACKING TYPE: DB VP5.

1	2	3	4	5	6	7
H	G	F	E	D	C	B
<p>1</p>						
<p>Rohs Compliant</p> <p>FAN Code: 4016032126164</p> <p>STR 407</p>						
<p>Part No.</p> <p>AK 621N-5</p>				<p>Title:</p> <p>DVI_D - DVI_D DUAL LINK CABLE</p>		
<p>Drawn by</p> <p>Dec.20,2005</p> <p>Alex Dan</p>		<p>Date</p> <p>Name</p>		<p>Scale</p> <p>N/A</p>		
<p>Checked by</p> <p>Dec.20,2005</p> <p>Norman Xu</p>		<p>Date</p> <p>Name</p>		<p>Unit</p> <p>MM</p>		
<p>Approved by</p>		<p>Date</p> <p>Name</p>		<p>Sheet</p> <p>1/1</p>		
<p>Electronic GmbH</p>						