


Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec:20,2005	01

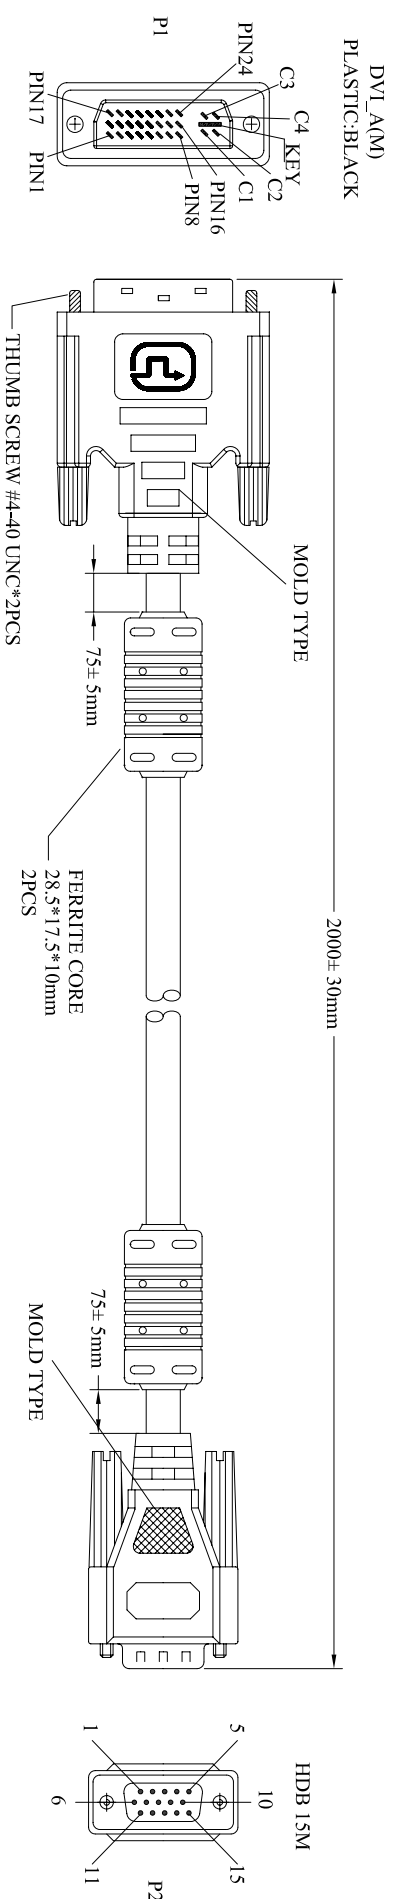

WIRE CONNECTION

P1	WIRE COLOR	P2
6	_____	15
7	_____	12
8	_____	14
14,16	_____	9
15	_____	5,10
C1	_____	1
KEY	_____	6
C2	_____	2
KEY	_____	7
C3	_____	3
KEY	_____	8
C4	_____	13
SHELL	BRAID SHIELDS	SHELL

NOTES:

- CABLE: 30AWG(7/0.102)COAXIALX3C+28AWG(7/0.127)x5C+28AWG(7/0.127)*1PAIR+AL/MYLAR+BRAID SHIELD+JACKET:PVC OD:7.0± 0.15mm COLOR:BLACK UL 20276 APPROVED
- CONNECTOR:
 - P1: DVI 29P: 24P+4KEY DIGITAL/ANALOG GOLD FLASH CONTACT NI PLATED SHELL
 - P2: HDB 15P MALE GOLD FLASH CONTACT NICKEL PLATED SHELL
- SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- HOOD:
 - P1&P2: MOLDED TYPE, PVC 45P, COLOR:BLACK
- TEST REQUESTED:
 - (1) 100% SHORT OPEN & MIS WIRE TEST
 - (2) CONTACT RESISTANCE 3 OHMS MAX
 - (3) INSULATION RESISTANCE 20M OHMS MIN
 - (4) HI-POT VOLTAGE 300V DC
- PACKING: SEE P-0039 REV.C PACKING DRAWING (HANKING SIZE MUST BE SMALLER THAN PACKING) PACKING TYPE: DV VP4.

Date	Name
Dec.20,2005	Alex Dan
Dec.20,2005	Norman Xu

Part No.	AK 622N
Title.	DVI_D/A - VGA HDB15 CABLE

ASSMANN
Electronic GmbH

Scale: N/A
Unit: MM

Sheet 1/1

Rohs Compliant

EAN Code: 4016032120889

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	A