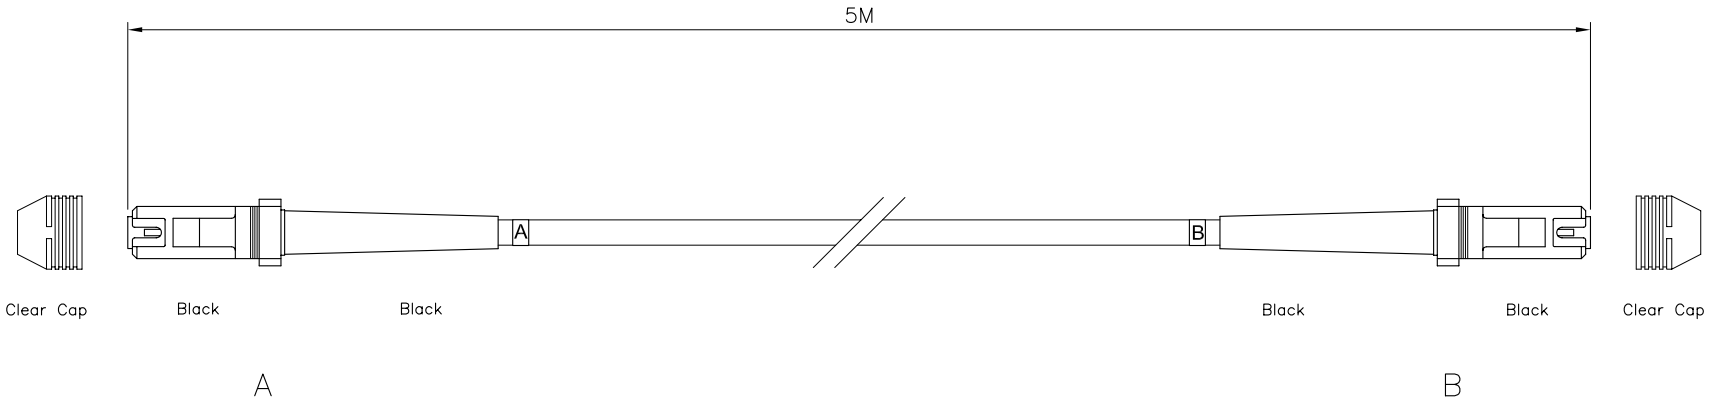

SPECIFICATION

1. Connector A: MT-RJ MM P/N: 11-MM-1-1
2. Connector B: MT-RJ MM P/N: 11-MM-1-1
3. Cable Type: Duplex ø3.0mm 50/125um MM
4. Length: 5M
5. Jacket Color: Orange
6. Insertion Loss: <0.5 dB
7. Package: Individual Bag

OPERATION

Fiber Extention: −0.05um < H < +0.05um
Ferrule End-face Radius: 10 < R < 25mm
Apex Offset: < 50um
Increase in insertion loss after 500 mating: 0.2 dB Max.
Operation Temperature: −20° to +70°
Storage Temperature: −40° to +80°
Humidity (non-condensing) 95%RH

UNIT M / M	DSGN	MAER	18.MAY.2004	ITEM NO: AL-5MTRJMTRJ-05I
	CHK			Duplex ø3.0mm 50/125um MM
SCALE 1 / 2	APPR			
DWG NO: AL-5MTRJMTRJ-05I	ASSMANN Electronic Components			