


P2,P3:	M-Y728A
	M-728A

Customer No:	NO.6
--------------	------

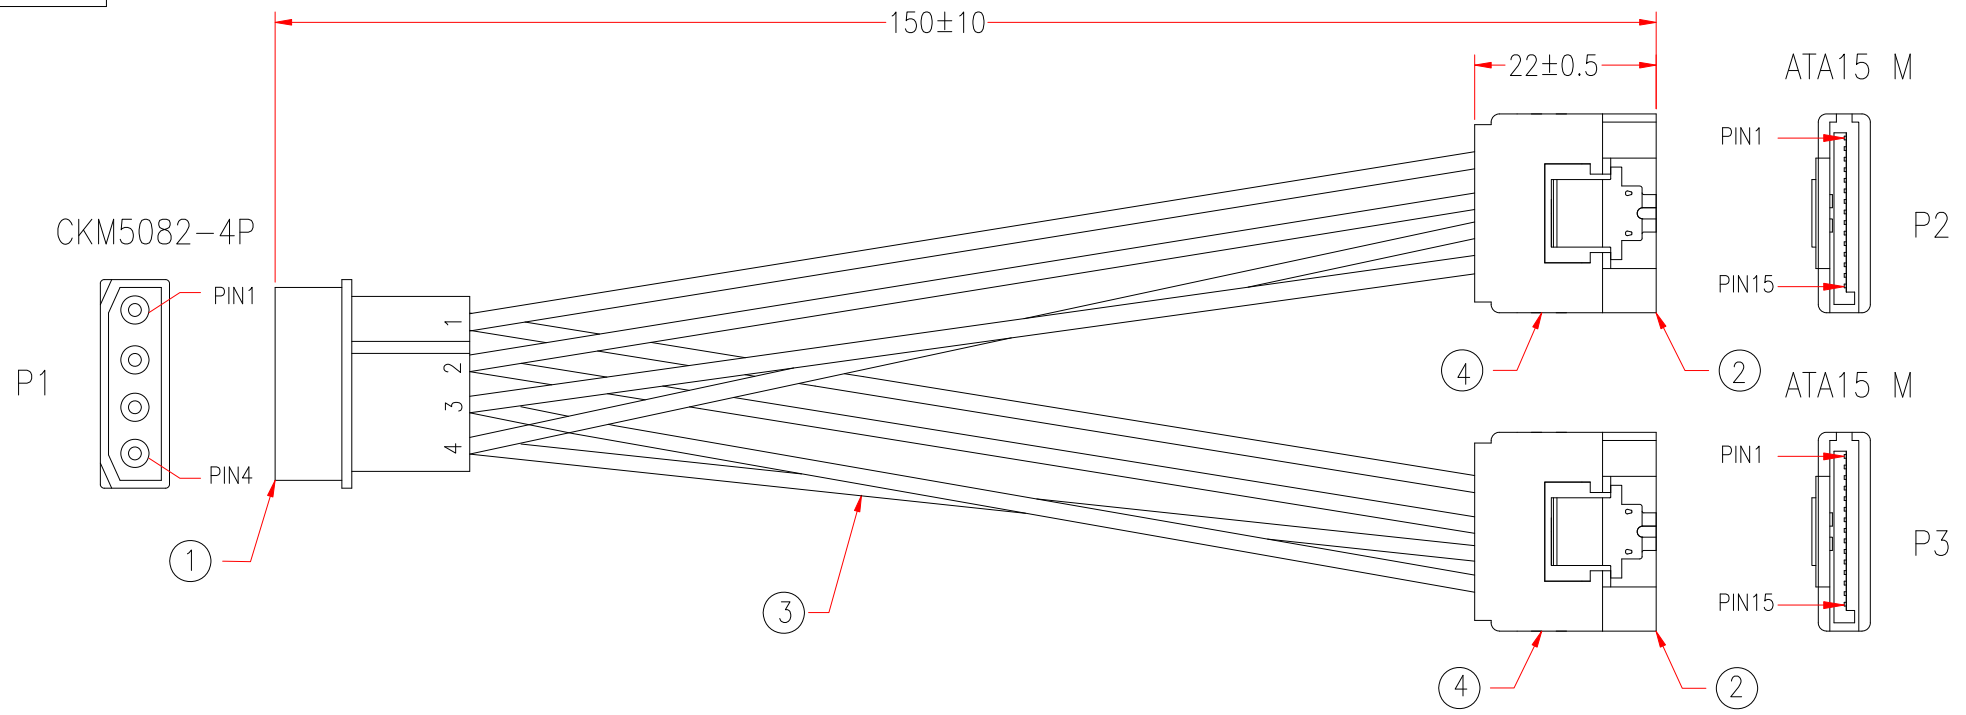

7556					
P1		P2		P3	
1	—	1	—	1	YELLOW
		2	—	2	
		3	—	3	
2	—	4	—	4	BLACK
		5	—	5	
		6	—	6	
3	—	10	—	10	BLACK
		11	—	11	
		12	—	12	
4	—	7	—	7	RED
		8	—	8	
		9	—	9	

*NOTE: All relevant materials are complied with RoHS directive .
 Testing Condition:
 100% OPEN and SHORT test
 Insulation Resistance 2M ohm

No.	DESCRIPTION	Q'TY	Supplier
4	MOLDED PVC BLACK		M304
3	UL1007 20AWG INSULATOR WIRE, LENGTH 130mm, ID1.8mm, COLOR:BLACK(4PCS), YELLOW(2PCS), RED(2PCS), DRAWING No. EH002001C-015	8	M304
2	SETIAL ATA CONNECTOR, MALE 15 PIN, BLACK PLASTIC WITH LATCH,	2	M843
1	TERMINAL: CKM5082-T	4	M31
	HOUSING: CKM5082-4P, PITCH 5.08mm	1	M31

PART NO. 7556		Revision:		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
APPROVED					
CHECKED	HU				
DRAWING	MEI				
DATE	21/JUN/10	ITEM NO.	K5345.015	UNIT:mm	

CHECKED