

1

2

3

4

5


6

7

Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2006	01

A

A

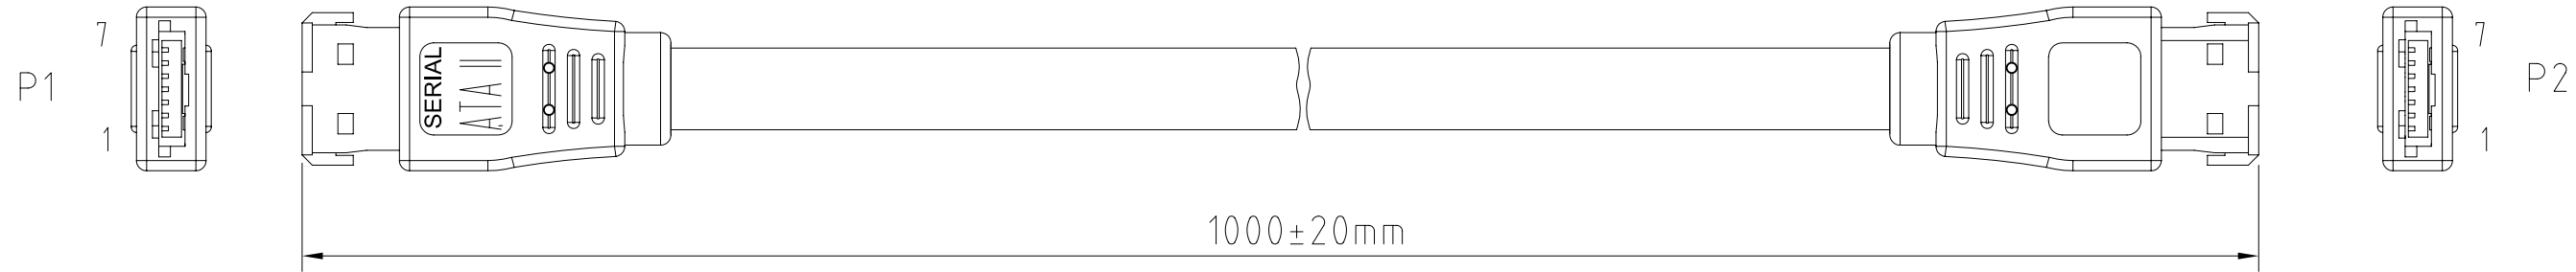


B

B

C

C




D

D

NOTE:

- 1.CABLE:UL2725 [26AWG(1/0.404)×2F INS:HD-PE ID:1.3×2.7+DRAIN WIRE 28AWG(1/0.32)×2C+AL/MY]×2C INNER JACKET:PVC OD:7.3×2.1mm +AL/MY+BRAID(16/10/0.1)PVC JACKET, COLOR: BLACK, OD:9.0×4.0mm, IMPEDANCE: 100 OHM.
- 2.CONNECTOR:  
P1&P2:SATA II 7P RIVETING TYPE PBT BLACK G/F W/METAL SHELL
- 3.SHIELD:COPPER-FOIL
- 4.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK
- 5.TEST REQUEST:  
100% OPEN SHORT MIS WIRE TEST  
CONTACT RESISTANCE 3 ohm MAX.  
INSULATION RESISTANCE 10M ohm MIN.  
HI-POT DC300V/0.01SEC.
- 6.PACKING: SEE P-0039 REV.C PACKING DRAWING.

PIN ASSIGNMENT

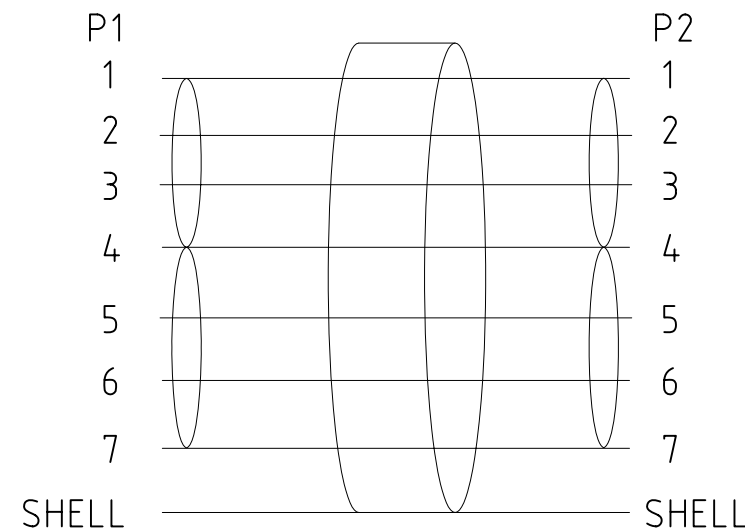

E

E

F

F

G

G

H

H

RoHS Compliant

EAN Code:  
4016032193838

ST81407

	Date	Name	Part No.	
Drawn by	Dec.20,2006	Alex Dan	<b>AK-ESATA-100</b>	
Checked by	Dec.20,2006	Norman Xu		
Approved by				
<b>ASSMANN</b> Electronic GmbH			Title. External Serial ATA Connectioncable (eSATA) with metal latch	
Scale	N/A	Sheet		
Unit	MM	1/1		

1

2

3

4

5

6

7