

	1	2	3	4	5	6	7		
						Signature Alex.Dan	Revision History For Bulk Production	Date Dec:20,2005	Rev. 01

A									
---	--	--	--	--	--	--	--	--	--

B									
---	--	--	--	--	--	--	--	--	--

C									
---	--	--	--	--	--	--	--	--	--

D									
---	--	--	--	--	--	--	--	--	--


E									
---	--	--	--	--	--	--	--	--	--

F									
---	--	--	--	--	--	--	--	--	--

G									
---	--	--	--	--	--	--	--	--	--

H									
---	--	--	--	--	--	--	--	--	--

1	2	3	4	5	6	7			
---	---	---	---	---	---	---	--	--	--

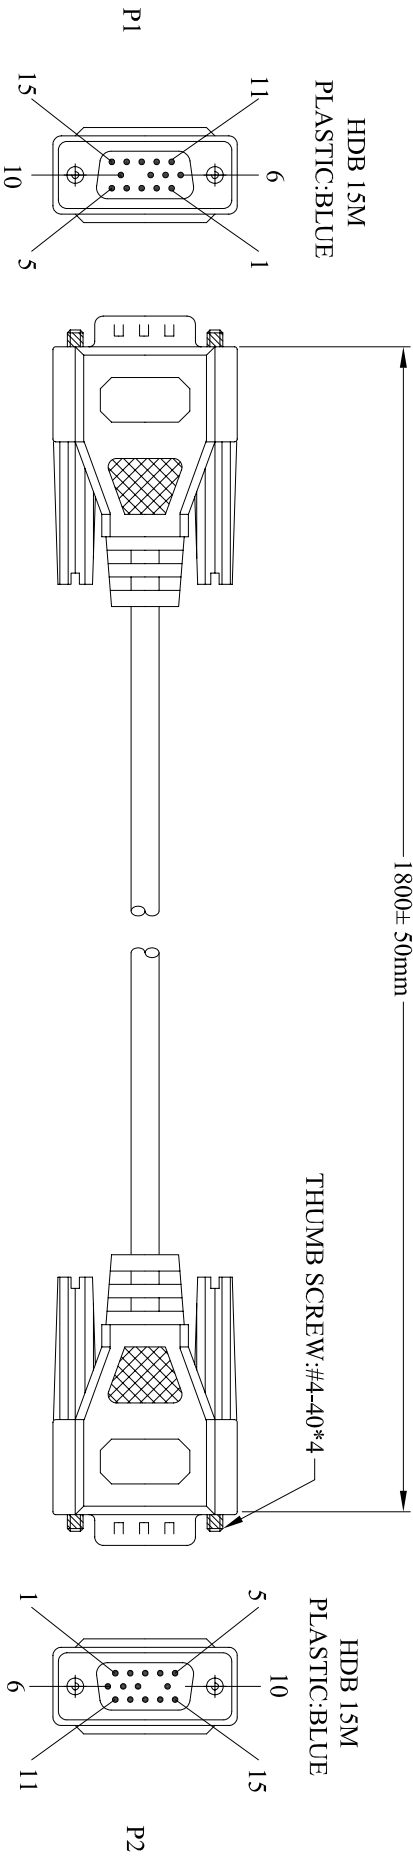

NOTES:

- 1.CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)*7C+ INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BEIGE, OD:Ø8.5± 0.15mm UL-2919


2.CONNECTOR:

- P1&P2:HDB 15P MALE,THE 9TH PIN IS EMPTY GOLD FLASH CONTACT, NICKEL PLATED SHELL
- 3.SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- 4.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- 5.ELECTRONIC TEST:

- <1> .100% OPEN SHORT & MIS WIRE TEST
- <2> .CONTACT RESISTANCE 30HMS MAX
- <3> .INSULATION RESISTANCE 20MOHMS MIN
- 6.PACKING:SEE P-0039 REV.C PACKING DRAWING
- (HANKING SIZE MUST BE SMALLER THAN PACKING)
- PACKING TYPE: DB VP4.

RoHS Compliant

EAN Code:
4016032064053

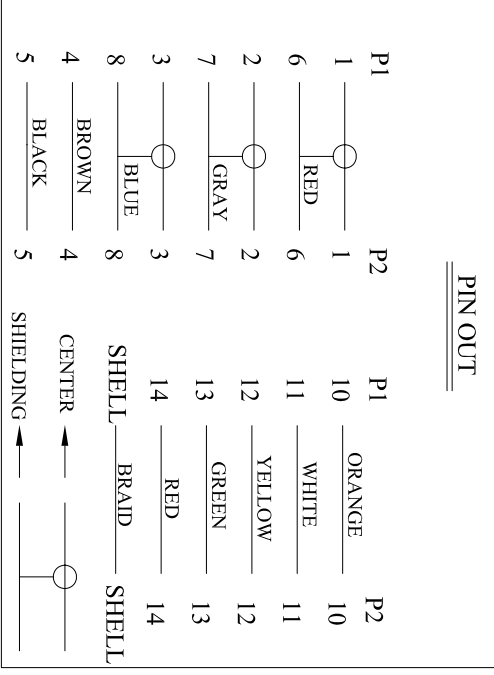

	Date	Name	Part No.
Drawn by	Dec.20,2005	Alex Dan	AK 5320X
Checked by	Dec.20,2005	Norman Xu	
Approved by			

ASSMANN
Electronic GmbH

Title.
Premium XGA Monitor Connection Cable

Scale
Unit

N/A
MM

Sheet
1/1